

## FLOWLOCK F2400-P


### 100% SOLIDS, SOLVENT FREE, 2K POLYURETHANE FLOOR COATING

Developed for dilapidations and refurbishment applications, where the system is easily specified in accordance with most decorations covenants, Flowlock F2400-P is a 100% solids, solvent free, twin-component, high-build polyurethane floor coating system for medium duty\* industrial applications.

It creates an abrasion resistant and high chemical resistant protective gloss layer.

The finished surface has very high scratch resistance and impact resistance due to its inherent flexibility.

A skid inhibiting surface can be incorporated into Flowlock F2400-P system to improve traction if required.

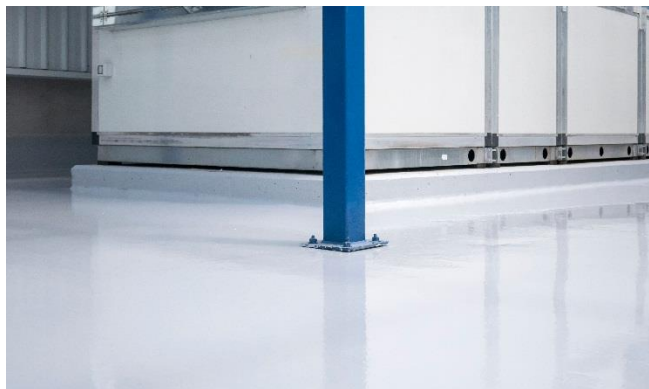

### VERY HIGH SCRATCH RESISTANCE – smarter for longer

Flowlock F2400-P has exceptionally high visible scratch resistance which ensures it remains looking new for considerably longer than many standard floor coatings, particularly epoxy formulations.

#### BENEFITS

- **Very high scratch resistance** - creates a long- term aesthetically pleasing surface
- 100% solids & solvent free – no odour
- Resistant to constant wear and abrasion
- Resistant to heat and frost cycles
- Very high chemical resistance
- Can incorporate skid inhibiting surface

#### USES

- Warehouses & Industrial production areas
- Internal car parking areas
- Offices & showrooms
- Sports floors
- Cold storage rooms
- Food processing plants

\* **Medium Duty** (definition according to FeRFA): Regular foot traffic, frequent forklift traffic and occasional hard wheeled trolleys

#### FLOWLOCK

(division of Rooflock)

**T:** 0161 945 1440 **E:** [info@flowlock.co.uk](mailto:info@flowlock.co.uk) **W:** [www.flowlock.co.uk](http://www.flowlock.co.uk)

**A:** Catford Road, Roundthorn Industrial Estate, Manchester, M23 9LR